



POLAR CASCADE™

Unit Specifications

COOLING TOWER

PC-010

SP-PC-010

Nominal tons are based on 95°F HW,
85°F CW, 78° Wet Bulb and 3GPM/Ton

GPM:	30
Electrical:	208-230/1
Fans:	1 - 24"
Blades:	4
Motors:	1 - 1/2 hp
RPM:	825
Full Load Amps:	208: 2.7
	230: 3.7



Cabinet:	16 GA. Galvannealed Steel
Base:	12 GA. Galvannealed Steel
Hot Water Basin:	16 GA. Stainless Steel
Finish:	3 mil. "Polane" Coating

Nominal Tons: 10

Depth:	50.155"
Width:	36.000"
Height:	57.182"
Water Inlet:	4"
Water Outlet:	2"
Overflow:	2"
Make-up Water:	3/4"

Cold Water Basin Capacity:	25.79 gal.
Hot Water Basin Capacity:	11.00 gal.

Shipping Weight:	380 lbs.
Operating Weight:	741 lbs.

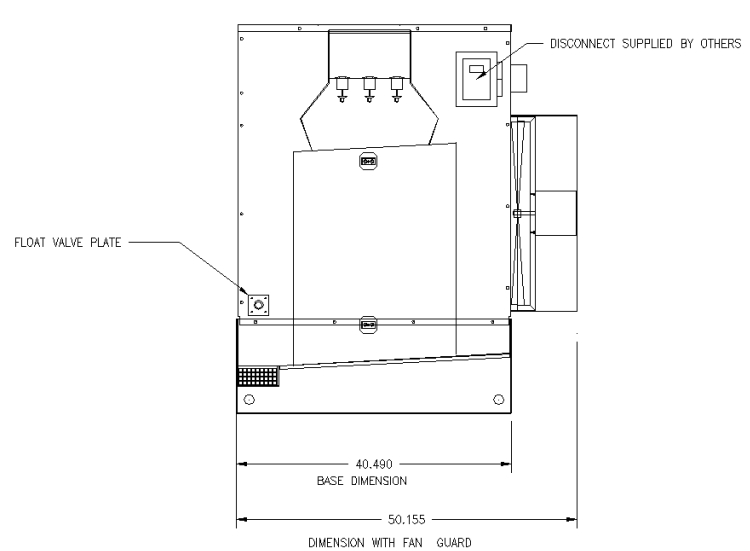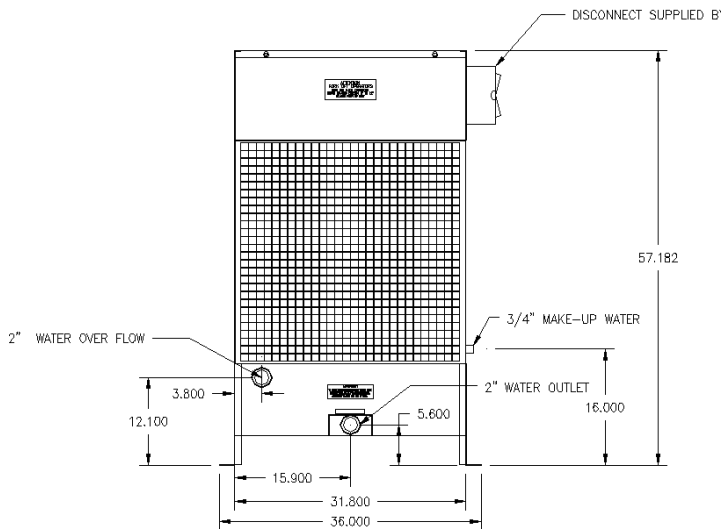

Available Accessories

- Water Storage Tank
- Intake Air Filter
- Basin Heater
- Heater Control Panel
- Vibration Isolators

*Cascade Cooling Towers are completely assembled. No field assembly required.
All units are run tested prior to shipment.*

Polar Air Systems, LLC

St. Louis, MO

www.polarairsystems.com

636-300-1589

© 2007 Polar Air Systems, LLC

SS-PC-010-708