



**POLAR CASCADE™**

# Unit Specifications

**COOLING TOWER**

**PC-110**



**SP-PC-110**

Nominal tons are based on 95°F HW,  
85°F CW, 78° Wet Bulb and 3GPM/Ton

**Nominal Tons: 110**

GPM:	330
Electrical:	208-230/460/3
Fans:	1 - 54"
Blades:	4
Motors:	1 - 3 hp
RPM:	1725
Full Load Amps:	208: 10.8 230: 8.4 460: 4.2
Cabinet:	16 GA. Galvannealed Steel
Base:	12 GA. Galvannealed Steel
Hot Water Basin:	16 GA. Stainless Steel
Finish:	3 mil. "Polane" Coating

Depth:	87.500"
Width:	96.200"
Height:	89.612"
Water Inlet:	6"
Water Outlet:	6"
Overflow:	2"
Make-up Water:	3/4"
Cold Water Basin Capacity:	86.10 gal.
Hot Water Basin Capacity:	90.52 gal.
Shipping Weight:	1,730 lbs.
Operating Weight:	5,958 lbs.

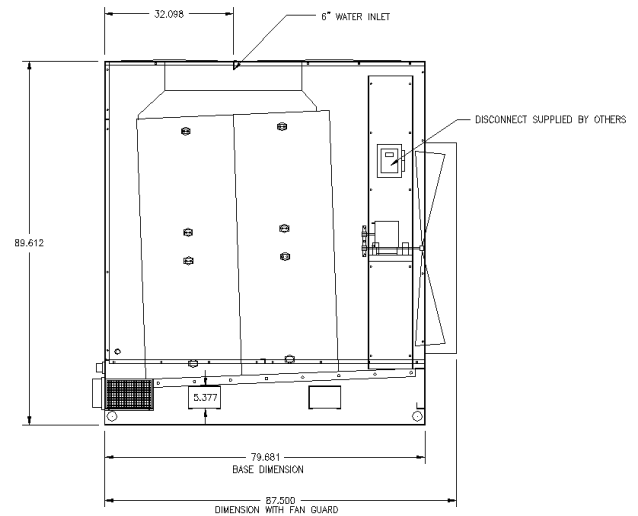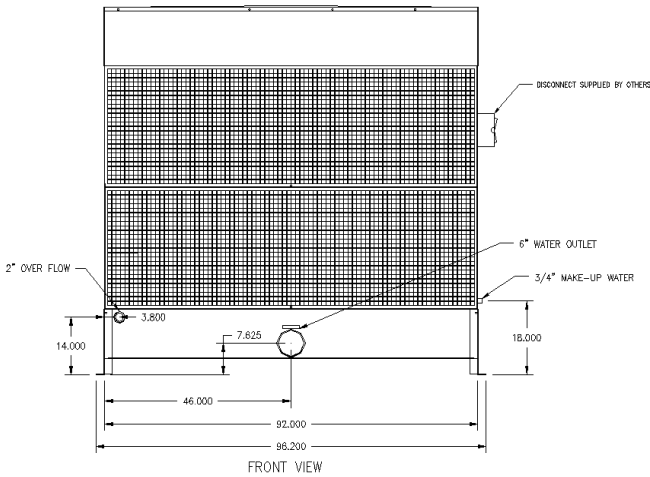

## Available Accessories

- Water Storage Tank
- Intake Air Filter
- Basin Heater
- Heater Control Panel
- Vibration Isolators

*Cascade Cooling Towers are completely assembled. No field assembly required.  
All units are run tested prior to shipment.*

## Polar Air Systems, LLC

St. Louis, MO

[www.polarairsystems.com](http://www.polarairsystems.com)

636-300-1589

© 2007 Polar Air Systems, LLC